Physical Data Organization

Introduction to Databases CompSci 316 Fall 2019



Announcements (Wed., Oct. 30)

- Homework 3 due Monday
- Project milestone 2 due Wednesday
 - Remember the weekly progress update due today
 - No weekly progress update due next week


Outline

- It's all about disks!
 - That's why we always draw databases as



- And why the single most important metric in database processing is (oftentimes) the number of disk I/O's performed
- Storing data on a disk
 - Record layout
 - Block layout
 - Column stores

Storage hierarchy

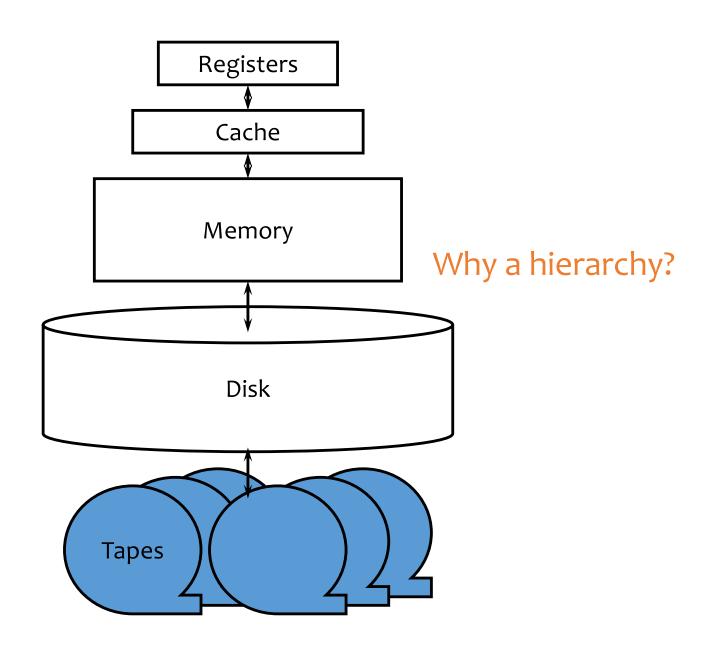

How far away is data?

<u>Location</u>	<u>Cycles</u>	<u>Location</u>	<u>Time</u>
Registers	1	My head	1 min.
On-chip cache	2	This room	2 min.
On-board cache	10	Duke campus	10 min.
Memory	100	Washington D.C.	1.5 hr.
Disk	10 ⁶	Pluto	2 yr.
Tape	10 ⁹	Andromeda	2000 yr.

(Source: AlphaSort paper, 1995) The gap has been widening!

I/O dominates—design your algorithms to reduce I/O!

Latency Numbers Every Programmer Should Know

```
Latency Comparison Numbers
L1 cache reference
                                              0.5 \, \mathrm{ns}
Branch mispredict
                                                  ns
L2 cache reference
                                                                          14x L1 cache
                                                  ns
Mutex lock/unlock
                                             25
                                                  ns
Main memory reference
                                            100
                                                                          20x L2 cache, 200x L1 cache
                                                  ns
Compress 1K bytes with Zippy
                                         3,000
                                                  ns
                                                            3 us
Send 1K bytes over 1 Gbps network
                                        10,000
                                                  ns
                                                          10 us
Read 4K randomly from SSD*
                                       150,000
                                                                          ~1GB/sec SSD
                                                         150 us
                                                  ns
Read 1 MB sequentially from memory
                                       250,000
                                                          250 us
                                                  ns
Round trip within same datacenter
                                       500,000
                                                          500 us
                                                  ns
Read 1 MB sequentially from SSD*
                                                     1,000 us 1 ms
                                     1,000,000
                                                                          ~1GB/sec SSD, 4X memory
                                                  ns
Disk seek
                                    10,000,000
                                                      10,000 us
                                                                          20x datacenter roundtrip
                                                                   10 ms
                                                  ns
Read 1 MB sequentially from disk
                                    20,000,000
                                                       20,000 us
                                                                          80x memory, 20X SSD
                                                                   20 ms
                                                  ns
Send packet CA->Netherlands->CA
                                   150,000,000
                                                 ns 150,000 us
                                                                 150 ms
```

Notes


```
1 ns = 10^-9 seconds
1 us = 10^-6 seconds = 1,000 ns
1 ms = 10^-3 seconds = 1,000 us = 1,000,000 ns
Credit
-----
```

By Jeff Dean: http://research.google.com/people/jeff/ Originally by Peter Norvig: http://norvig.com/21-days.html#answers

A typical hard drive




A typical hard drive

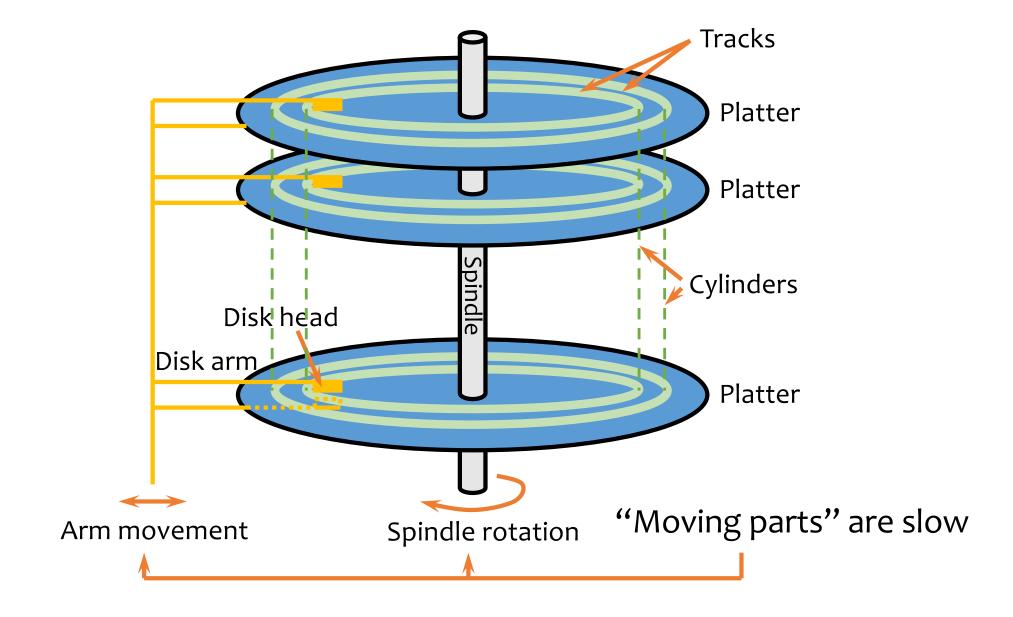

Top view

"Zoning": more sectors/data on outer tracks

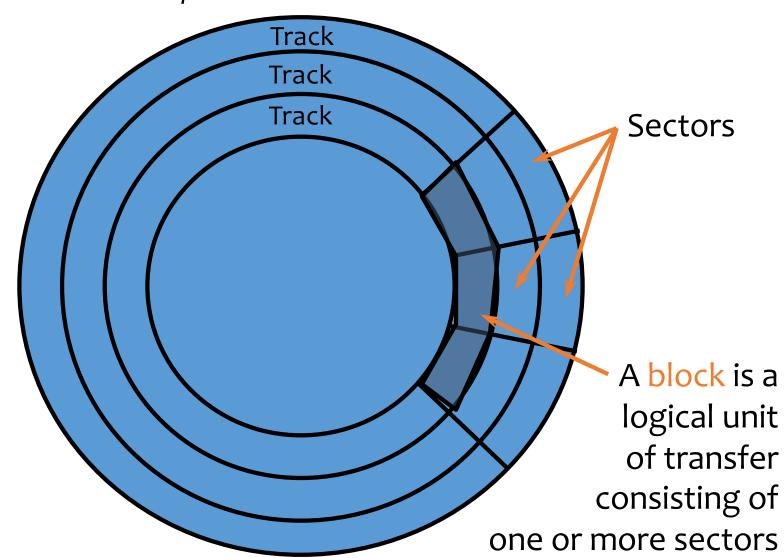

Disk access time

Sum of:

- Seek time: time for disk heads to move to the correct cylinder
- Rotational delay: time for the desired block to rotate under the disk head
- Transfer time: time to read/write data in the block (= time for disk to rotate over the block)

Random disk access

Seek time + rotational delay + transfer time

- Average seek time
 - Time to skip one half of the cylinders?
 - Not quite; should be time to skip a third of them (why?)
 - "Typical" value: 5 ms
- Average rotational delay
 - Time for a half rotation (a function of RPM)
 - "Typical" value: 4.2 ms (7200 RPM)

Sequential disk access

Seek time + rotational delay + transfer time

- Seek time
 - o (assuming data is on the same track)
- Rotational delay
 - o (assuming data is in the next block on the track)
- Easily an order of magnitude faster than random disk access!

What about SSD (solid-state drives)?



What about SSD (solid-state drives)?

- No mechanical parts
- Mostly flash-based nowadays
- 1-2 orders of magnitude faster random access than hard drives (under 0.1ms vs. several ms)
 - But still much slower than memory (\sim 0.1 μ s)
- Little difference between random vs. sequential read performance
- Random writes still hurt
 - In-place update would require erasing the whole "erasure block" and rewriting it!

Important consequences

- It's all about reducing I/O's!
- Cache blocks from stable storage in memory
 - DBMS maintains a memory buffer pool of blocks
 - Reads/writes operate on these memory blocks
 - Dirty (updated) memory blocks are "flushed" back to stable storage
- Sequential I/O generally cheaper than random I/O

Performance tricks

- Disk layout strategy
 - Keep related things (what are they?) close together: same sector/block → same track → same cylinder → adjacent cylinder
- Prefetching
 - While processing the current block in memory, fetch the next block from disk (overlap I/O with processing)
- Parallel I/O
 - More disk heads working at the same time
- Disk scheduling algorithm
 - Example: "elevator" algorithm
- Track buffer
 - Read/write one entire track at a time

Record layout

Record = row in a table

- Variable-format records
 - Rare in DBMS—table schema dictates the format
 - Relevant for semi-structured data such as XML
- Focus on fixed-format records
 - With fixed-length fields only, or
 - With possible variable-length fields

Fixed-length fields


- All field lengths and offsets are constant
 - Computed from schema, stored in the system catalog
- Example: CREATE TABLE User(uid INT, name CHAR(20), age INT, pop FLOAT);

C) 2	}	2	4	2	8	<u>3</u> 6
	142	Bart (padded with space)		1	0	0.9	


- Watch out for alignment
 - May need to pad; reorder columns if that helps
- What about NULL?
 - Add a bitmap at the beginning of the record

Variable-length records

- Example: CREATE TABLE User(uid INT, name VARCHAR(20), age INT, pop FLOAT, comment VARCHAR(100));
- Approach 1: use field delimiters ('\0' okay?)



Approach 2: use an offset array



- Put all variable-length fields at the end (why?)
- Update is messy if it changes the length of a field

LOB fields

- Example: CREATE TABLE User(uid INT, name CHAR(20), age INT, pop FLOAT, picture BLOB(32000));
- User records get "de-clustered"
 - Bad because most queries do not involve picture
- Decomposition (automatically and internally done by DBMS without affecting the user)
 - (<u>uid</u>, name, age, pop)
 - (<u>uid</u>, picture)


Block layout

How do you organize records in a block?

- NSM (N-ary Storage Model)
 - Most commercial DBMS
- PAX (Partition Attributes Across)
 - Ailamaki et al., VLDB 2001

NSM

- Store records from the beginning of each block
- Use a directory at the end of each block
 - To locate records and manage free space
 - Necessary for variable-length records

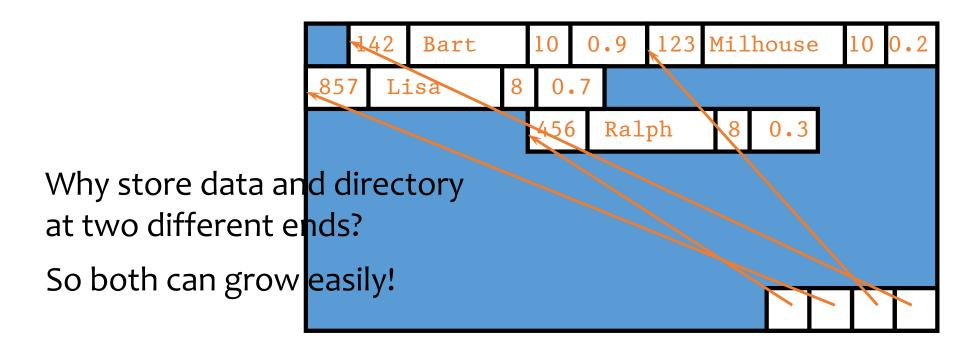



Options

- Reorganize after every update/delete to avoid fragmentation (gaps between records)
 - Need to rewrite half of the block on average
- A special case: What if records are fixed-length?
 - Option 1: reorganize after delete
 - Only need to move one record
 - Need a pointer to the beginning of free space
 - Option 2: do not reorganize after update
 - Need a bitmap indicating which slots are in use

Cache behavior of NSM

- Query: SELECT uid FROM User WHERE pop > 0.8;
- Assumptions: no index, and cache line size < record size
- Lots of cache misses
 - uid and pop are not close enough by memory standards

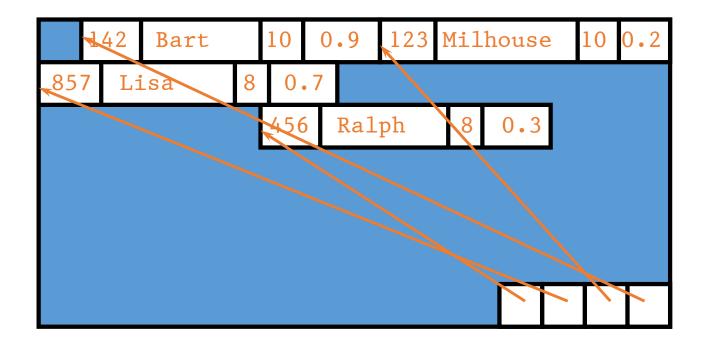




Cache

PAX

- Most queries only access a few columns
- Cluster values of the same columns in each block
 - When a particular column of a row is brought into the cache, the same column of the next row is brought in together

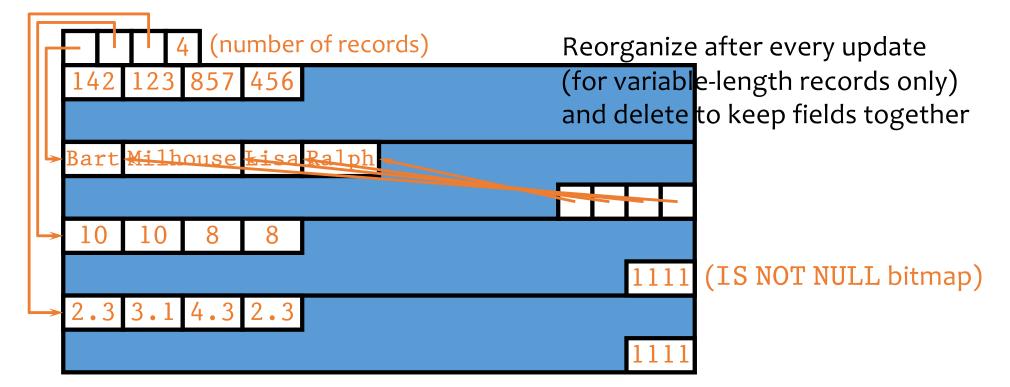

Beyond block layout: column stores

- The other extreme: store tables by columns instead of rows
- Advantages (and disadvantages) of PAX are magnified
 - Not only better cache performance, but also fewer I/O's for queries involving many rows but few columns
 - Aggressive compression to further reduce I/O's
- More disruptive changes to the DBMS architecture are required than PAX
 - Not only storage, but also query execution and optimization

Example: Apache Parquet

- A table is horizontally partitioned into row groups (~512MB-1GB/row group); each group is stored consecutively
 - On a "block" of HDFS (Hadoop Distributed File System)
- A row group is vertically divided into column chunks, one per column
- Each column chunk is stored in pages (~8KB/page); each page can be compressed/encoded independently

Not designed for in-place updates though!

Summary

- Storage hierarchy
 - Why I/O's dominate the cost of database operations
- Disk
 - Steps in completing a disk access
 - Sequential versus random accesses
- Record layout
 - Handling variable-length fields
 - Handling NULL
 - Handling modifications
- Block layout
 - NSM: the traditional layout
 - PAX: a layout that tries to improve cache performance
- Column stores: NSM transposed, beyond blocks