Relational Model & Algebra

CPS 216

Advanced Database Systems

Announcements

- Homework #1 and course project will be assigned next Wednesday (January 22)
- Reading assignments in the "red book" will be photocopied and available outside my office (D327)
  - Codd paper is already there!
- There IS a recitation session this Friday (January 17) on E/R database design and review of relational algebra and design theory
- Instructor and TA office hours will be finalized this Wednesday

Relational data model

- A database is a collection of relations (or tables)
- Each relation has a list of attributes (or columns)
  - Set-valued attributes not allowed
- Each attribute has a domain (or type)
- Each relation contains a set of tuples (or rows)
  - Duplicates not allowed

☞ Simplicity is a virtue!

Example

Student

SID	*name*	*age*	*GPA*
142	Bart	10	2.3
123	Milhouse	10	3.1
857	Lisa	8	4.3
456	Ralph	8	2.3
...	...	...	...

Course

CID	*title*
CPS216	Advanced Database Systems
CPS230	Analysis of Algorithms
CPS214	Computer Networks
...	...

Enroll

SID	*CID*
142	CPS216
142	CPS214
123	CPS216
857	CPS216
857	CPS230
456	CPS214
...	...

Ordering of rows doesn't matter (even though the output is always in *some* order)

Why did Codd call them "relations"?

Schema versus instance

- Schema (metadata)
  - Specification of how data is to be structured logically
  - Defined at set-up
  - Rarely changes
- Instance
  - Content
  - Changes rapidly, but always conforms to the schema
- ☞ Compare to types and instances of types in a programming language

Example

- Schema
  - *Student* (*SID* integer, *name* string, *age* integer, *GPA* float)
  - *Course* (*CID* string, *title* string)
  - *Enroll* (*SID* integer, *CID* integer)
- Instance
  - { ⟨142, Bart, 10, 2.3⟩, ⟨123, Milhouse, 10, 3.1⟩, ...}
  - { ⟨CPS216, Advanced Database Systems⟩, ...}
  - { ⟨142, CPS216⟩, ⟨142, CPS214⟩, ...}

Relational algebra operators

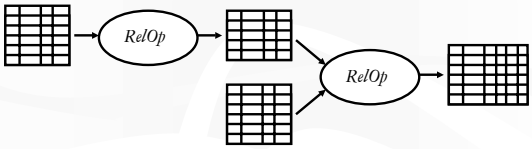

- Core set of operators:
  - Selection, projection, cross product, union, difference, and renaming
- Additional, derived operators:
  - Join, natural join, intersection, etc.

Selection

- Input: a table R
- Notation: $\sigma_p (R)$
  - p is called a selection condition/predicate
- Purpose: filter rows according to some criteria
- Output: same columns as R, but only rows of R that satisfy p

Selection example

- Students with GPA higher than 3.0

  $\sigma_{GPA > 3.0}$ (*Student*)



SID	name	age	GPA
142	Bart	10	2.3
123	Milhouse	10	3.1
857	Lisa	8	4.3
456	Ralph	8	2.3

SID	name	age	GPA
123	Milhouse	10	3.1
857	Lisa	8	4.3

More on selection

- Selection predicate in general can include any column of R, constants, comparisons such as $=$, $\leq$, etc., and Boolean connectives $\wedge$, $\vee$, and $\neg$
  - Example: straight A students under 18 or over 21

    $\sigma_{GPA \geq 4.0 \wedge (age < 18 \vee age > 21)}$ (*Student*)
- But you must be able to evaluate the predicate over a single row
  - Example: student with the highest GPA

    $\sigma_{\cancel{GPA > \text{all GPA in } Student \text{ table}}}$ (*Student*)

Projection

- Input: a table R
- Notation: π_L (R)
  - L is a list of columns in R
- Purpose: select columns to output
- Output: same rows, but only the columns in L

Projection example

- ID's and names of all students

  $\pi_{SID,\ name}$ (*Student*)

SID	*name*	*age*	*GPA*
142	Bart	10	2.3
123	Milhouse	10	3.1
857	Lisa	8	4.3
456	Ralph	8	2.3

→ $\pi_{SID,\ name}$ →

SID	*name*
142	Bart
123	Milhouse
857	Lisa
456	Ralph

More on projection

- Duplicate output rows must be removed
  - Example: student ages

π_{age} (*Student*)

SID	*name*	*age*	*GPA*
142	Bart	10	2.3
123	Milhouse	10	3.1
857	Lisa	8	4.3
456	Ralph	8	2.3

π_{age}

age
10
8

Cross product

- Input: two tables *R* and *S*
- Notation: $R \times S$
- Purpose: pairs rows from two tables
- Output: for each row *r* in *R* and each row *s* in *S*, output a row *rs* (concatenation of *r* and *s*)

Cross product example

- *Student* × *Enroll*

SID	*name*	*age*	*GPA*
142	Bart	10	2.3
123	Milhouse	10	3.1
...	...	...	...

$\times$

SID	*CID*
142	CPS216
142	CPS214
123	CPS216
...	...

SID	*name*	*age*	*GPA*	*SID*	*CID*
142	Bart	10	2.3	142	CPS216
142	Bart	10	2.3	142	CPS214
142	Bart	10	2.3	123	CPS216
123	Milhouse	10	3.1	142	CPS216
123	Milhouse	10	3.1	142	CPS214
123	Milhouse	10	3.1	123	CPS216
...	...	...	...	...	...

A note on column ordering

- The ordering of columns in a table is considered unimportant (so is the ordering of rows)

SID	name	age	GPA	SID	CID
142	Bart	10	2.3	142	CPS216
142	Bart	10	2.3	142	CPS214
142	Bart	10	2.3	123	CPS216
123	Milhouse	10	3.1	142	CPS216
123	Milhouse	10	3.1	142	CPS214
123	Milhouse	10	3.1	123	CPS216
...	...	...	...	...	...

=

SID	CID	SID	name	age	GPA
142	CPS216	142	Bart	10	2.3
142	CPS214	142	Bart	10	2.3
123	CPS216	142	Bart	10	2.3
142	CPS216	123	Milhouse	10	3.1
142	CPS214	123	Milhouse	10	3.1
123	CPS216	123	Milhouse	10	3.1
...	...	...	...	...	...

- That means cross product is commutative, i.e., $R \times S = S \times R$ for any R and S

Derived operator: join

- Input: two tables R and S
- Notation: $R \bowtie_p S$
  - p is called a join condition/predicate
- Purpose: relate rows from two tables according to some criteria
- Output: for each row r in R and each row s in S, output a row rs if r and s satisfy p
- Shorthand for $\sigma_p (R \times S)$

Join example

- Info about students, plus CID's of their courses

$Student \bowtie_{Student.SID\ =\ Enroll.SID} Enroll$

SID	name	age	GPA
142	Bart	10	2.3
123	Milhouse	10	3.1
...	...	...	...

$\bowtie_{Student.SID\ =\ Enroll.SID}$

SID	CID
142	CPS216
142	CPS214
123	CPS216
...	...

SID	name	age	GPA	SID	CID
142	Bart	10	2.3	142	CPS216
142	Bart	10	2.3	142	CPS214
[redacted]					
123	Milhouse	10	3.1	123	CPS216
...	...	...	...	...	...

Derived operator: natural join

- Input: two tables R and S
- Notation: $R \bowtie S$
- Purpose: relate rows from two tables, and
  - Enforce equality on all common attributes
  - Eliminate one copy of common attributes
- Shorthand for $\pi_L (R \bowtie_p S)$
  - L is the union of all attributes from R and S, with duplicates removed
  - p equates all attributes common to R and S

Natural join example

- $Student \bowtie Enroll = \pi_? (Student \bowtie_? Enroll)$

  $= \pi_{SID,\ name,\ age,\ GPA,\ CID} (Student \bowtie_{Student.SID\ =\ Enroll.SID} Enroll)$

SID	name	age	GPA
142	Bart	10	2.3
123	Milhouse	10	3.1
...	...	...	...

SID	CID
142	CPS216
142	CPS214
123	CPS216
...	...



SID	name	age	GPA	[redacted]	CID
142	Bart	10	2.3	[redacted]	CPS216
142	Bart	10	2.3	[redacted]	CPS214
[redacted]					
123	Milhouse	10	3.1	[redacted]	CPS216
...	...	...	...	[redacted]	...

Union

- Input: two tables R and S
- Notation: $R \cup S$
  - R and S must have identical schema
- Output:
  - Has the same schema as R and S
  - Contains all rows in R and all rows in S, with duplicates eliminated

Difference

- Input: two tables R and S
- Notation: $R - S$
  - R and S must have identical schema
- Output:
  - Has the same schema as R and S
  - Contains all rows in R that are not found in S

Derived operator: intersection

- Input: two tables R and S
- Notation: $R \cap S$
  - R and S must have identical schema
- Output:
  - Has the same schema as R and S
  - Contains all rows that are in both R and S
- Shorthand for $R - (R - S)$
- Also equivalent to $S - (S - R)$

Renaming

- Input: a table R
- Notation: $\rho_S (R)$, or $\rho_{S(A_1, A_2, \ldots)} (R)$
- Purpose: rename a table and/or its columns
- Output: a renamed table with the same rows as R
- Used to
  - Avoid confusion caused by identical column names
  - Create identical columns names for natural joins

Renaming example

- SID's of students who take at least two courses

Summary of core operators

- Selection: $\sigma_p (R)$
- Projection: $\pi_L (R)$
- Cross product: $R \times S$
- Union: $R \cup S$
- Difference: $R - S$
- Renaming: $\rho_{S(A_1, A_2, \ldots)} (R)$
  - Does not really add to expressive power

Summary of derived operators

- Join: $R \bowtie_p S$
- Natural join: $R \bowtie S$
- Intersection: $R \cap S$

- Many more
  - Semijoin, anti-semijoin, quotient, …

An exercise

- CID's of the courses that Lisa is NOT taking

A trickier exercise

- SID's of students who take exactly one course

Monotone operators

- If some old output rows must be removed
  - Then the operator is non-monotone
- Otherwise the operator is monotone
  - That is, old output rows remain "correct" when more rows are added to the input
  - Formally, $R \subseteq R'$ implies $RelOp(R) \subseteq RelOp(R')$

Classification of relational operators

- Selection: $\sigma_p (R)$
- Projection: $\pi_L (R)$
- Cross product: $R \times S$
- Join: $R \bowtie_p S$
- Natural join: $R \bowtie S$
- Union: $R \cup S$
- Difference: $R - S$
- Intersection: $R \cap S$

Why is "—" needed for highest GPA?

- Composition of monotone operators produces a monotone query
  - Old output rows remain "correct" when more rows are added to the input
- Exactly-one query is non-monotone
  - Say Nelson is currently taking only CPS216
  - Add another record to *Enroll*: Nelson takes CPS214 too
  - Nelson is no longer in the answer
- So it must use difference!

Why do we need core operator X?

- Difference
- Cross product
- Union
- Selection? Projection?
  - Homework problem ☺

Why is r.a. a good query language?

- Declarative?
  - Yes, compared with older languages like CODASYL
  - But operators are inherently procedural
- Simple
  - A small set of core operators who semantics are easy to grasp
- Complete?
  - With respect to what?

Relational calculus

- $\{ s.SID \mid s \in Student \wedge \neg(\exists s' \in Student: s.GPA < s'.GPA) \}$, or
  $\{ s.SID \mid s \in Student \wedge (\forall s' \in Student: s.GPA \geq s'.GPA) \}$
- Relational algebra = "safe" relational calculus
  - Every query expressible as a safe relational calculus query is also expressible as a relational algebra query
  - And vice versa
- Example of an unsafe relational calculus query
  - $\{ s.name \mid \neg(s \in Student) \}$
  - Cannot evaluate this query just by looking at the database

Turing machine?

- Relational algebra has no recursion
  - Example of something not expressible in relational algebra: Given relation *Parent*(*parent*, *child*), who are Bart's ancestors?
- Why not recursion?
  - Optimization becomes undecidable
  - You can always implement it at the application level
  - Recursion is added to SQL nevertheless